


LUMENS / <i>Lumens</i>	fino a / up to 2250
EFFICIENZA / <i>efficiency</i>	103lm/W@700mA
COLLEGAMENTO/ <i>Wiring</i>	EMERG. a richiesta
TEMPERATURA COLORE / <i>CCT</i>	3/4/6000 K
INDICE RESA CROMATICA / <i>CRI</i>	85
STRUTTURA / <i>Housing</i>	
SCHERMO / <i>Diffuser</i>	
UGR	
DISTRIBUZIONE / <i>light distribution</i>	Simmetrica/Symmetric
FINITURA / <i>Finish</i>	Bianco RAL 9003/ <i>White Ral 9003</i>

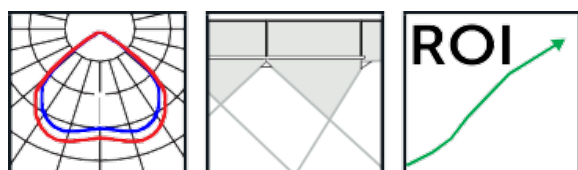

lumen	CCT	potenza	Dimensioni	Peso
(lm)	(K)	(W)	(mm)	(kg)
910	3000	9	115X70,5X90	
1660	3000	16	115X70,5X90	
2250	3000	20	115X70,5X90	
910	4000	9	190X102X160	
1660	4000	16	190X102X160	
2250	4000	20	190X102X160	
910	6000	9	240X117X200	
1660	6000	16	240X117X200	
2250	6000	20	240X117X200	

A RICHIESTA / ON REQUEST

EMERGENZA - 1-10 DIM - DALI DIM

LED	ECG		IP65 & IP44	IK	GARANZIA 5 ANNI		110-240V 50-60 HZ			
-----	-----	--	-------------------	----	--------------------	--	----------------------	--	--	--

Schede tecniche complete varianti disponibili su [www.mgilluminazone.it](http://www.mgilluminazone.it)