


LUMENS / <i>Lumens</i>	fino a / up to 600
EFFICIENZA / <i>efficiency</i>	86lm/W@700mA
COLLEGAMENTO / <i>Wiring</i>	
TEMPERATURA COLORE / <i>CCT</i>	3/4/6000 K
INDICE RESA CROMATICA / <i>CRI</i>	85
STRUTTURA / <i>Housing</i>	
SCHERMO / <i>Diffuser</i>	
UGR	
DISTRIBUZIONE / <i>light distribution</i>	Simmetrica/Symmetric
FINITURA / <i>Finish</i>	Bianco RAL 9003/ White Ral 9003

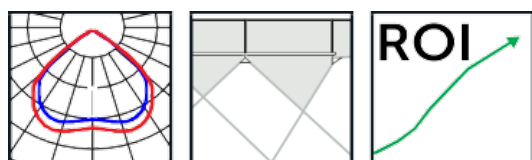

lumen	CCT	potenza	Dimensioni	Peso
(lm)	(K)	(W)	(mm)	(kg)
530	3000	7	103X84X73	2,1
550	4000	7	103X84X73	2,1
600	6000	7	103X84X73	2,6

DISPONIBILE A RICHIESTA / AVAILABLE ON REQUEST

EMERGENZA

LED	ECG		IP 65	IK	GARANZIA 5 ANNI		110-240V 50-60 HZ			
-----	-----	--	-------	----	--------------------	--	----------------------	--	--	--

Schede tecniche complete varianti disponibili su www.mgilluminazone.it