



Nettuno 1000

Nettuno 1000 / 2000W SM-AS

Proiettore per esterni

Proiettore per esterni a fascio simmetrico e asimmetrico. Adatto per l'illuminazione di impianti sportivi, aree commerciali, scali ferroviari, stazioni aeroportuali e grandi aree in genere.

Caratteristiche tecniche

Corpo e telaio. In pressofusione di alluminio, staffa di sostegno in piatto di acciaio verniciato, viteria esterna in acciaio inox. Verniciatura a polveri poliestere colore nero.

Riflettore. In alluminio ossidato e brillantato anodicamente, a fascio simmetrico.

Vetro di protezione. Piano temperato, spessore 5mm, resistente agli shock termici ed agli urti.

Equipaggiamento. Vetro di protezione spesso 5mm temperato, resistente agli shock termici e agli urti. Portalampada in porcellana E40. Passacavo Pg 13,5 in nylon anti trapasso per cavo tripolare Ø minimo 1,5mm e Ø massimo 2,5.

Vano porta accenditore disponibile:

- Vuota con piastra di cablaggio e componentistica.

- Completa di piastra per cablaggio, componentistica, condensatore ed alimentatore per lampada JM 1000W.

- Completa di piastra per cablaggio, componentistica, condensatore ed alimentatore per lampada HPS 1000W.

- Completa di piastra per cablaggio, componentistica, condensatore ed alimentatore per JM 2000W - 380V 8,8A con accenditore incorporato.

- Completa di piastra per cablaggio, componentistica, condensatore ed alimentatore per lampada 230V 16,5.

Colori. Nero, grigio.

Versione standar. Attacco lampada E40, colore nero.

ARTICOLO/ITEM	POTENZA/POWER	LAMP. LAMPHOLDER	ESEC.	VOL. m ²	PESO/WEIGHT (Kg)
NETTUNO	1000W E40	E40	NC	0,09	15,00
NETTUNO	2000W E40	E40	NC	0,09	16,00
NETTUNO	MH-TPH 1000W 8,2A	E40	CNR	0,09	33,00
NETTUNO	SHP-T/MH-T 1000W 10,3-9,5A	E40	CNR	0,09	33,00
NETTUNO	MH-T 2000W 10,3A	E40	CNR	0,09	35,00
NETTUNO	MH-T 2000W 8,8A	E40	CNR	0,09	35,00

TUTTI GLI ARTICOLI SONO DISPONIBILI IN VERSIONE SIMMETRICA E ASIMMETRICA





Nettuno 2000

Outdoor floodlight

Symmetrical and asymmetrical beam floodlight. For outdoor use as sports grounds, industrial sites, railway yards, airports and other large areas.

Technical features

Body and frame. In die-cast aluminium, supporting bracket in painted steel plate bar. Stainless-steel external screws. Painting in polyester powder coating black colour.

Reflector. Oxidized, anode-process-polished, in extra pure aluminium symmetric.

Diffuser. Heat resistant and shock-proof tempered protecting glass, 5mm thick.

Wiring. Waterproof silicone rubber sealing gasket. Pg 13, 5 cable gland in tearproof nylon for triple-wire cables Ø min 1,5mm/ max 2,5mm.

Available with aluminium die-cast wiring box.

Polyester powder coating:

- Empty box with wiring plate and electrical components.
- Complete with wiring, electrical components, capacitor and ballast for 1000W JM lamp.
- Complete with wiring, electrical components, capacitor and ballast for 1000W HPS lamp.
- Complete with wiring, electrical components, capacitor and ballast for Osram HQI-T 2000/N - 2000W JM-380V/8,8 Amp. Lamp with built-in ignitor.
- Complete with wiring, electrical components, capacitor and ballast for Osram 2000 HQD-DI - 2000W - 380V/10,30 Amp. Lamp with built-in ignitor.
- Complete with wiring, electrical components, capacitor, ballast and ignitor for 230V/16,5 Amp. Lamp.

Colour. Black, grey.

Standard version. Lamp holder E40, colour black.

Packaging. Single .

ALL ITEMS ARE AVAILABLE SYMMETRICAL AND ASYMMETRICAL


cassetta cablaggio 1000-2000W



fissaggio staffetta 1000-2000W



vano portalampada 2000W

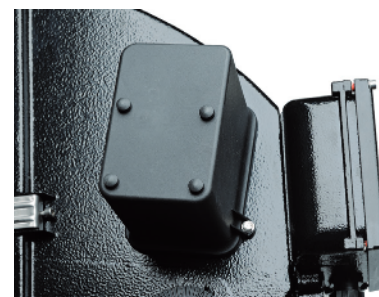

alimentatore
1000-2000W



alimentatore
1000-2000W



Nettuno 1000 w

Nettuno 2000 w

