


LUMENS / <i>Lumens</i>	fino a / up to 7500
EFFICIENZA / <i>efficiency</i>	145lm/W@700mA
COLLEGAMENTO / <i>Wiring</i>	ECG / DALI a richiesta
TEMPERATURA COLORE / <i>CCT</i>	4000 K
INDICE RESA CROMATICA / <i>CRI</i>	> 80
STRUTTURA / <i>Housing</i>	policarbonato grigio / <i>grey polycarbonate</i>
SCHERMO / <i>Diffuser</i>	policarbonato opale / <i>opal polycarbonate</i>
LENTI / <i>Lences</i>	
DISTRIBUZIONE / <i>light distribution</i>	diretta 160° / <i>direct 160°</i>
FINITURA / <i>Finish</i>	PC/grey polycarbonate
VERNICIATURA / <i>Paint</i>	Polvere poliestere resistente UV / <i>UV resistant polyester powder</i>

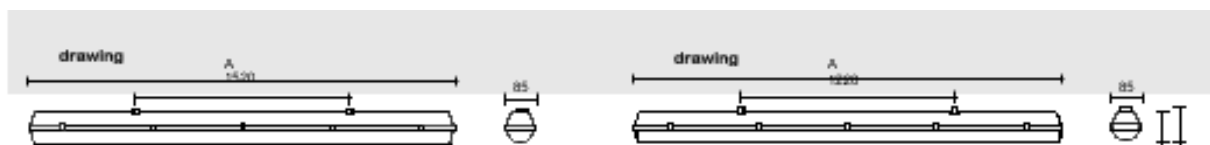

lumen (lm)	CCT (K)	potenza (W)	Dimensioni (mm)	Peso (kg)
3.150	4000	20	A:1220 D:845	1,80
3750	4000	25	A:1220 D:845	1,80
4500	4000	30	A:1220 D:845	1,80
5150	4000	35	A:1220 D:845	1,80
4550	4000	29	A:1520 D:845	2,20
5400	4000	36	A:1520 D:845	2,20
6450	4000	43	A:1520 D:845	2,20
7500	4000	52	A:1520 D:845	2,20

LED	ECG	ECG DALI On request	IP 66	IK	GARANZIA 5 ANNI		110-240V 50-60 HZ			
-----	-----	---------------------------	-------	----	--------------------	--	----------------------	--	--	--

Schede tecniche complete varianti disponibili su www.mgilluminaazione.it